



www.temprecord.com

## SUPERCOOL – General Multi Use



- **Accurate & Reliable** – Proven Temprecord performance and economy.
- **Applications** – Monitoring storage and transit of perishable products in SUPERCOOL (very LOW) temperature environments as part of the cold chain. Capable of monitoring temperatures as low as  $-80^{\circ}\text{C}$  /  $-112^{\circ}\text{F}$  with probe.
- 8K non-volatile memory
- Calibrated temperature accuracy is  $0.2^{\circ}\text{C}$  /  $0.35^{\circ}\text{F}$  (Logger Case temperature range is  $-50^{\circ}\text{C}$  to  $+60^{\circ}\text{C}$  or  $-58^{\circ}\text{F}$  to  $+140^{\circ}\text{F}$ )
- 3-Point Calibration built into logger:
  - superior accuracy guarantee
  - no need for corrections/complex calculations to be applied to downloaded data
  - avoids human data entry errors, providing data integrity and peace of mind
- Calibrated and corrected at 3-Points to ISO/IEC 17025 Calibration Laboratory Standards
  - traceable Calibration Certificate included
- Temperature Units:  $^{\circ}\text{C}$  or  $^{\circ}\text{F}$
- Display Resolution:  $0.01^{\circ}\text{C}$  or  $0.01^{\circ}\text{F}$
- TRW software:
  - Hi-speed download
  - Serial RS-232 or USB connectivity
  - compatible with Windows XP, Vista and Windows 7
- Compliance made easy with automated PDF report generation. Use speed-buttons from TRW software to:
  - save as \*.TR and/or \*.PDF files
  - export to MS Excel – part or all samples
  - email
  - print
- Save time with Auto Mode (for batch programming):
  - Start / Stop / Status display
  - download/read recorded data
  - save downloaded file as \*.TR or \*.PDF
  - print file
  - email file
    - reuse logger
- Fully welded food grade plastic case
  - FDA approved
  - recyclable
- Case protection rating: waterproof to IP67 or NEMA 6



# SUPERCOOL GENERAL MULTI USE DATA LOGGERS

## Low Temperature Range

Supercool data loggers feature a LOW temperature range Thermistor Sensor, allowing very low temperature recordings down to -80°C/-112°F with probe.

## Accuracy – Calibrated to 0.2°C / 0.35°F

Supercool data loggers go through a 3-Point calibration process during manufacturing. Traceable Calibration Certificates are included with each logger from our ISO/IEC 17025 accredited laboratory. PDF copies of Calibration Certificates are also downloadable from the web site at: [www.temprecord.com/certificates.html](http://www.temprecord.com/certificates.html)

## 8K Non-volatile Memory

The Supercool Multi-use data logger supports 8K of memory (7,935 samples). User-configurable sample period provides from 4.4 hours up to 2 years of data recording.

## LED Status Indicators


'Within limits' (Green) LED Indicator and 'Out of limits' (Red) LED Indicator allow instant confirmation of recorded data being within or outside of specified upper and lower temperature range.

## Push Button Start/Stop or Mark

The Push Button (when enabled) allows User to 'Start' or 'Stop' the data logger anywhere without needing sophisticated software or hardware in the field. During recording, indication 'Markers' can be included for future reference by pressing the button for two seconds until the red LED flashes two times. If button disabled then the logger can be started or stopped using Temprecord for Windows (TRW) software – available FREE!

## Four External Probe Options

Choose from four different external probe options including Stainless Steel Straight probe, Bent probe, Teflon probe and Plastic Handle probe.

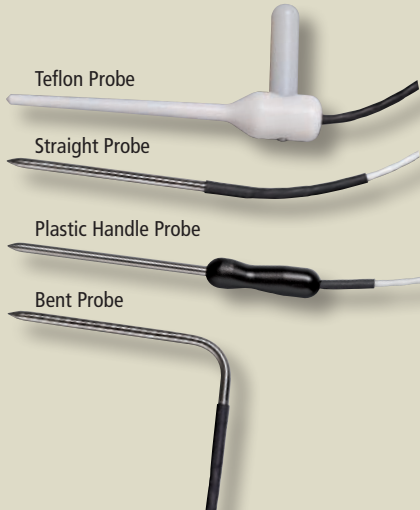

Teflon Probe

Straight Probe

Plastic Handle Probe

Bent Probe

## Temprecord International Limited

PO Box 58 430, Botany,  
Auckland 2163, New Zealand.  
Phone: (09) 274 9825,  
Fax: (09) 273 4020  
Email: [info@temprecord.com](mailto:info@temprecord.com)  
Web: [www.temprecord.com](http://www.temprecord.com)



## Case Protection Rating

Waterproof to IP67 or NEMA 6 rated. Ultrasonically welded plastic case is durable in extreme conditions. FDA approved food grade casing.

## LED Status Indicators

The 'Out of limits' (Red) LED Indicator and 'Within limits' (Green) LED Indicator allow instant confirmation of recorded data being within the specified temperature range. Software setup allows the selection of range limits and the number of samples out of range to activate the alarm feature.

## Push Button

Integrated Push Button feature allows User to 'Start' or 'Stop' data logger in the field. Also allows for the setting of indication 'Markers' during data recording for future reference. Functionality of the Push Button can be enabled or disabled through TRW software.

## Retaining Hole

Fully moulded and ultrasonically welded retaining hole for easy securing of the data logger within different environments.

Parameter	Specifications
Model	Multitrip Blue – SUPERCOOL – Multi Use Temperature Data Logger
Memory	8K Non-volatile
Sample Capacity	Approx. 7,935 samples minimum
Sample Period	Programmable between 2 seconds and 36 hours in 2 second increments
Start Delay	Programmable between 10 seconds and 36 hours
Start and Stop	Logger Button (if enabled), Palm PDA/Reader, TRW Software/Reader
Recording Duration	4.4 hours to 2 years
Operating Temperature Range of Case	-50°C ~ +60°C, -58°F ~ +140°F
Operating Temperature Range of Data Logger	-50°C ~ +60°C, -58°F ~ +140°F
Operating Temperature Range with LOW Temperature Probe	-80°C ~ +110°C, -112°F ~ +230°F
*Temperature Accuracy Case	0.2°C / 0.35°F over the range -20°C / -4°F to +50°C / +122°F else 0.5°C / 0.9°F
With Probe	0.2°C / 0.35°F over the range -40°C / -40°F to +50°C / +122°F else 0.5°C / 0.9°F
Display Resolution	0.01°C / 0.01°F
Within Limits Indicator	One flash from Green LED Indicator every 10 seconds
Out of Limits Indicator	One flash from Red LED Indicator every 10 seconds
Battery Type	Lithium Thionyl Chloride (3.6V)
Dimensions	129 x 73.5 x 14mm or 5 <sup>1</sup> / <sub>8</sub> x 2 <sup>7</sup> / <sub>8</sub> x 5 <sup>8</sup> / <sub>16</sub> inches
Weight	83g or 2.92oz
Case Colour	Blue
Case and Protection Rating	IP67 or NEMA 6. Fully welded FDA approved food grade casing
Warranty Period	12 months on data logger from date of purchase 2 years on battery

\*Accuracy is calibrated with a traceable reference thermometer to 0.2°C (0.35°F) at temperatures -15°C, 0°C and +40°C, or -38°C, 0°C and +40°C for probe model.

