

ETR101A

EXHAUST TEMPERATURE SYSTEM



Features

- 10 Year Battery Life
- 1 Second Reading Rate
- Multiple Start/Stop Function
- Ultra High Speed Download
- 500,000 Reading Storage Capacity
- Memory Wrap
- Battery Life Indicator
- Optional Password Protection
- Programmable High and Low Alarms
- N.I.S.T. Traceable
- Field Upgradeable

Benefits

- Simple Setup and Installation
- Minimal Long-Term Maintenance
- Long-Term Field Deployment

Applications

- Profile exhaust temperature of on-road vehicles and off-road equipment

The ETR101A is an Exhaust Temperature Profiling Kit designed to profile the exhaust temperature of on-road vehicles and off-road equipment, including tractor trailers, buses, trucks over 14,000 lbs., waste water vehicles, and sweepers. The ETR101A comes assembled and includes a data logger, temperature sensor (thermocouple type K), weatherproof enclosure, interface cable, hex screwdriver and software. A 1/4" NPT coupler and a compression fitting is required for assembling, but not included.


Setup is fast and easy. The 1/4" NPT coupler is attached to the exhaust pipe; the use of a compression fitting allows for the thermocouple to be placed directly in the exhaust stream, providing for highly accurate profiling. The data logger, which is contained within the weatherproof enclosure, is then mounted to the vehicle.

Using the MadgeTech software, the logger is programmed to record for a set period, generally three to five days. Data is stored in the data logger, and is downloadable at any time via a pc or laptop computer. The complete temperature profile is then provided to the diesel particulate filter (DPF) manufacturer, aiding in the selection of the correct DPF for the exhaust system.

Many DPF manufacturers, including Donaldson Corp., recommend the use of temperature profiling equipment, such as the MadgeTech ETR101A, to aid in the selection of the appropriate diesel particulate filter.



MADGETECH DATA LOGGER SOFTWARE

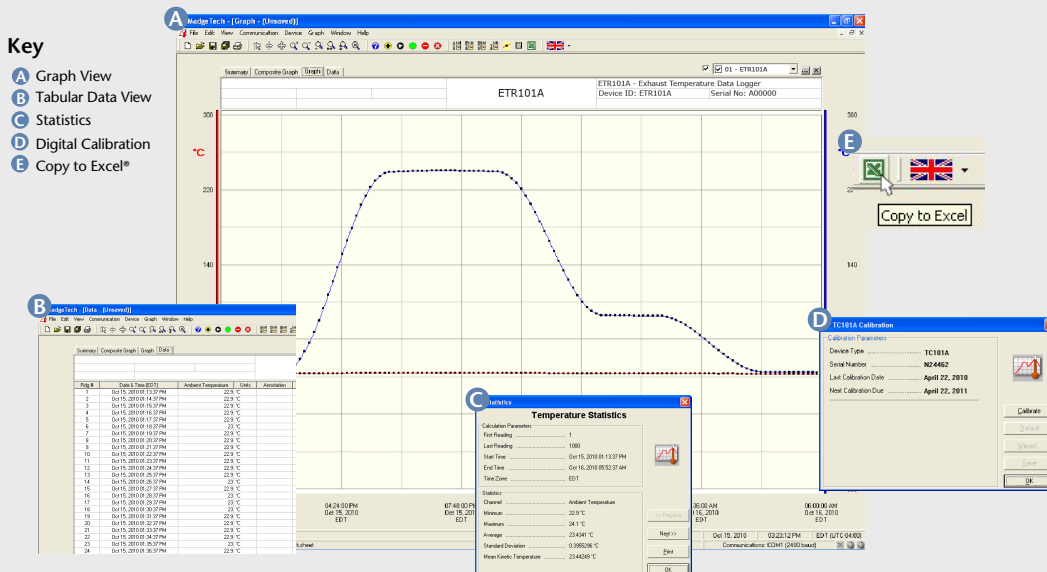

- ### Software Features:
- Multiple graph overlay
 - Statistics
 - Digital calibration
 - Zoom in/ zoom out
 - Full time zone support
 - Data annotation
 - Min./Max./Average lines
 - Data table view
 - Automatic report generation
 - Summary view
 - Multilingual

ETR101A SPECIFICATIONS*

Internal Channel

Temperature Range: -40°C to +80°C (-40°F to +176°F)

Temperature Resolution: 0.1°C (0.18°F)

Calibrated Accuracy: ±0.25°C (±0.45°F)

Remote Channel

Thermocouple Types: K

Thermocouple Connection: Pluggable screw terminal

Cold Junction Compensation: Automatic based on internal channel

Max. Thermocouple Resistance: 100Ω

Thermocouple Type	Range (°C)	Resolution	Accuracy
K	-260 to +1370	0.1°C	±2°C

* Thermocouple accuracy is specified with a 24 AWG

Reading Rate: 1 reading every second to 1 every 24 hours

Memory: 500,000 readings; software configurable memory wrap
250,000 readings in multiple start/stop mode

Wrap Around: Yes

Start Modes: • Immediate start
• Delay start up to 18 months
• Multiple pushbutton start/stop

Stop Modes: • Manual through software
• Timed (specific date and time)

Multiple Start/Stop Mode: Start and stop the device multiple times without having to download data or communicate with a PC

Multiple Start/Stop Mode To start the device:

Activation: Press and hold the pushbutton for 5 seconds, the green LED will flash during this time. The device has started logging.

To stop the device:

Press and hold the pushbutton for 5 seconds, the red LED will flash during this time. The device has stopped logging.

Real Time Recording: The device may be used with PC to monitor and record data in real-time

Alarm: Programmable high and low limits; alarm is activated when temperature reaches or exceeds set limits

LED Functionality: Green LED blinks:

10 second rate to indicate logging

15 second rate to indicate delay start mode

Red LED blinks:


10 second rate to indicate low battery and/or full memory

1 second rate to indicate an alarm condition

Password Protection: An optional password may be programmed into the device to restrict access to configuration options. Data may be read out without the password.

Battery Type: 3.6V lithium battery included; user replaceable

Battery Life: 10 years typical at a 15 minute reading rate

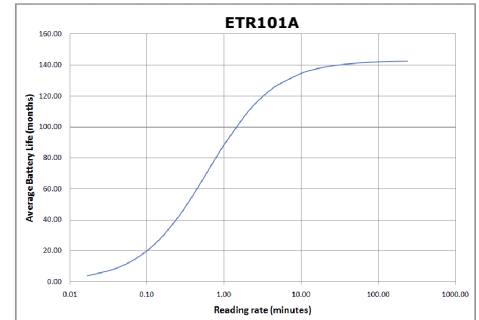

Graph display of the device recording in a 25°C environment.

Data Format: Date and time stamped °C, °F, K, °R; μV, mV, V

Time Accuracy: ±1 minute/month (at 20°C, stand alone data logging)

Computer Interface: USB (interface cable required); 115,200 baud

Software: XP SP3/Vista/Windows 7

Operating Environment: -40°C to +80°C (-40°F to +176°F), 0 to 95%RH non-condensing

Dimensions: Data Logger:

1.4" x 2.2" x 0.6" (36mm x 56mm x 16mm)

Waterbox:

3.5" x 2.9" x 1.1" (87mm x 73mm x 27mm)

Thermocouple Wire:

24 gauge, 30 inches (762mm)

Thermocouple Probe:

6" x 1/8" dia. (153mm x 3.2mm)

Weight: Complete Kit: 15oz (425g)

Waterbox, data logger and thermocouple:
10oz (283g)

BATTERY WARNING: WARNING: FIRE, EXPLOSION, AND SEVERE BURN HAZARD. DO NOT SHORT CIRCUIT, CHARGE, FORCE OVER DISCHARGE, DISASSEMBLE, CRUSH, PENETRATE OR INCINERATE. BATTERY MAY LEAK OR EXPLODE IF HEATED ABOVE 80°C (176°F).

*SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. SPECIFIC WARRANTY AND REMEDY LIMITATIONS APPLY. CALL 1-603-456-2011 OR GO TO WWW.MADGETECH.COM FOR DETAILS.

ORDERING INFORMATION

MODEL	DESCRIPTION
ETR101A	Exhaust Temperature Recording System Type K Thermocouple included. <i>Other types available upon request. Contact MadgeTech for details.</i>
LTC-7PN	Replacement battery for ETR101A

For quantity discounts call 1300 737 871 or email customer-service@instrumentchoice.com.au

Supplied in Australia by Instrument Choice
Call our scientists on 1300 737 871
www.instrumentchoice.com.au

ASK ABOUT
OUR OTHER
DATA
LOGGERS

Temperature
Humidity
Pressure
pH
Level
Shock
LCD Display
Pulse/Event/State
Current
Voltage
Wireless
Intrinsically Safe
Spectral Vibration
Motion