

IRTC101A

INFRARED THERMOCOUPLE

DATA LOGGER



Features

- 10 Year Battery Life
- Wide Temperature Range
- Uses Thermocouple Type K (contact sales for other types)
- High Speed Download
- N.I.S.T. Traceable
- Real-time Operation
- Low Cost
- Programmable Start Time
- Miniature Size

Benefits

- Simple Setup and Installation
- Minimal Long-Term Maintenance
- Long-Term Field Deployment

Applications

- Non-contact Temperature Monitoring
- Flow Monitoring
- Surface Temperature
- Process Verification and Validation
- Remote Areas
- Moving Objects
- Long Distance Temperature Measurement
- Heavy Equipment


The IRTC101A is a battery powered infrared thermocouple based temperature data logger. It provides nearly instantaneous, non-contact temperature measurements, making it a perfect solution for applications such as surface temperature recording and monitoring moving objects.



The IRTC101A features a 10 year battery life, 1 second reading rate, a multiple start/stop function, ultra-high speed download capability, 500,000 reading storage capacity, optional memory wrap, battery life indicator, optional password protection, programmable high-low alarms and more.

As the leader in low power data logger technology, MadgeTech continuously improves its products and develops solutions to meet ever-changing challenges. The IRTC101A was designed with our customers in mind. MadgeTech offers free firmware upgrades for the life of the product so that data loggers already deployed in the field can grow with new technological developments. Units do not need to be returned to the factory for upgrades. The user can do this from any PC.

MADGETECH DATA LOGGER SOFTWARE

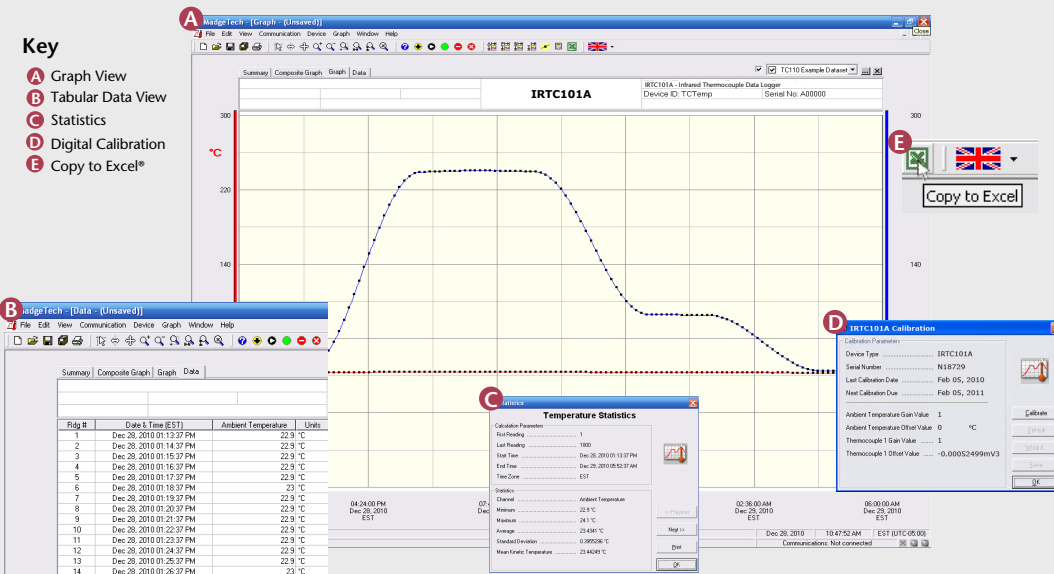

Software Features:

- Multiple graph overlay
- Statistics
- Digital calibration
- Zoom in/ zoom out
- Lethality equations (F₀, PU)
- Mean Kinetic Temperature
- Full time zone support
- Data annotation
- Min./Max./Average lines
- Data table view
- Automatic report generation
- Summary view
- Multilingual

IRTC101A SPECIFICATIONS*

Internal Channel

Temperature Range: -40°C to +80°C (-40°F to +176°F)

Temperature Resolution: 0.1°C (0.18°F)

Calibrated Accuracy: ±0.25°C (±0.45°F)

Remote Channel

Thermocouple Type: K (Infrared, contact sales for other types)

Thermocouple connection: Female subminiature (SMP)

Cold Junction Compensation: Automatic, based on internal channel

Maximum Thermocouple Resistance: 3000Ω

Thermocouple Type	Range (°C)	Sensor
K	25 to 80°C	±2.0°C

Contact for other ranges.

Field of View: 60° (1:1)

Minimum Spot Size: 8 mm (0.3")

Spectral Response: 6.5 to 14 microns

Reading Rate: 1 reading every second to 1 every 24 hours

Memory: 500,000 readings; software configurable memory wrap
250,000 readings in multiple start/stop mode

Wrap Around: Yes

- Start Modes:
- Immediate start
 - Delay start up to 18 months
 - Multiple pushbutton start/stop

- Stop Modes:
- Manual through software
 - Timed (specific date and time)

Multiple Start/Stop Mode: Start and stop the device multiple times without having to download data or communicate with a PC

Multiple Start/Stop Mode To start the device:

Activation: Press and hold the pushbutton for 5 seconds, the green LED will flash during this time. The device has started logging.

To stop the device:

Press and hold the pushbutton for 5 seconds, the red LED will flash during this time. The device has stopped logging.

Real Time Recording: The device may be used with PC to monitor and record data in real-time

Alarm: Programmable high and low limits; alarm is activated when temperature reaches or exceeds set limits


LED Functionality: Green LED blinks:
10 second rate to indicate logging
15 second rate to indicate delay start mode

Red LED blinks:
10 second rate to indicate low battery and/or full memory
1 second rate to indicate an alarm condition

Password Protection: An optional password may be programmed into the device to restrict access to configuration options. Data may be read out without the password.

Battery Type: 3.6V lithium battery included; user replaceable

Battery Life: 10 years typical at a 15 minute reading rate

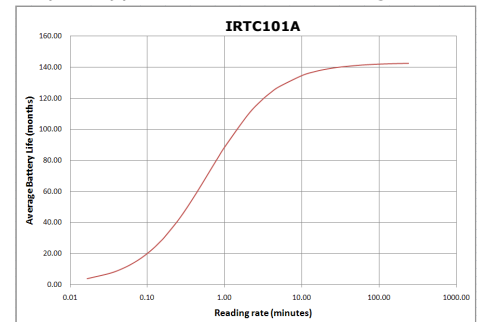

Graph display of the device recording in a 25°C environment.

Data Format: Date and time stamped °C, °F, K, °R; μV, mV, V

Time Accuracy: ±1 minute/month (at 20°C, stand alone data logging)

Computer Interface: USB (interface cable required); 115,200 baud

Software: XP SP3/Vista/Windows 7

Operating Environment: -18 to +70°C (-40 to 158°F)

Dimensions: 1.4" x 2.2" x 0.6" (36mm x 56mm x 16mm)

Data Logger Probe: 3.25" L x 1.80 cm Dia. (1.28 x 0.71"); 0.9 m

Dimensions: (36") PFA coated unshielded stranded wire

Weight: 0.9 oz (24 g)

BATTERY WARNING: FIRE, EXPLOSION, AND SEVERE BURN HAZARD. DO NOT RECHARGE, DISASSEMBLE, HEAT ABOVE 212°F, INCINERATE OR EXPOSE CONTENTS TO WATER.

*SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. SPECIFIC WARRANTY REMEDY LIMITATIONS APPLY. CALL 1-603-456-2011 OR GO TO WWW.MADGETECH.COM FOR DETAILS.

ORDERING INFORMATION

MODEL	DESCRIPTION
IRTC101A	Thermocouple Recorder with infrared thermocouple.
IFC200	Software, manual and USB interface cable
LTC-7PN	Replacement battery for IRTC101A

For quantity discounts call 1300 737 871 or email customer-service@instrumentchoice.com.au

Supplied in Australia by Instrument Choice
Call our scientists on 1300 737 871
www.instrumentchoice.com.au

ASK ABOUT
OUR OTHER
DATA
LOGGERS

Temperature
Humidity
Pressure
pH
Level
Shock
LCD Display
Pulse/Event/State
Current
Voltage
Wireless
Intrinsically Safe
Spectral Vibration
Motion