

# WIRELESS WEATHER STATION

## INSTRUCTION MANUAL



MODEL: WS1151

	Page
1. Inventory of contents .....	2
2. Feature .....	2
3. Set up guide.....	2
3.1 Battery installation .....	2
3.2 Mounting .....	3
4. LCD overview .....	3
4.1 LCD overview.....	3
4.2 Weather forecasting .....	4
4.3 Weather tendency indicator .....	4
4.4 Examples of changing weather icons .....	4
4.5 Storm warning indicator .....	5
5. Program modes.....	5
5.1 Quick display mode.....	5
5.2 Setting mode.....	5
5.3 Alarm mode.....	6
5.4 Min/Max mode.....	7
6. City Location listing.....	7
7. Problems and interference with operation .....	8
8. Specification.....	8

*This Operation Manual is part of this product and should be kept in a safe place for future reference. It contains important notes on setup, operation and resetting when necessary.*

### ※ NOTE

Thank you for purchasing this Wireless Weather Station. This is a combined operation manual for WS1151. Designed for everyday use, the weather station will prove to be an asset of great value for your personal use in the home or office. Please read this instruction manual thoroughly to fully understand the correct operation of your weather station and benefit from its unique features.

## 1. Inventory of contents

- 1) 1 x Base station
- 2) 1 x One WH2A remote sensor with mounting bracket
- 3) 1 x Instruction manual
- 4) 1 x Warranty Card

## 2. Feature

- 1) Wireless outdoor and indoor humidity (%RH)
- 2) Wireless outdoor and indoor temperature (°F or °C)
- 3) Records min. and max. humidity
- 4) Records min. and max. temperature
- 5) Barometric pressure 24-hour history graph (inHg or hPa)
- 6) Weather forecast tendency arrows
- 7) Forecast icons based on changing barometric pressure
- 8) Time and date by manual setting
- 9) 12 or 24-hour time display
- 10) Perpetual calendar
- 11) Time alarm with snooze
- 12) Can receive one sensor
- 13) LED backlight
- 14) Wall hanging or free standing
- 15) Included transmitter WH2A
- 16) Low battery indicator
- 17) Synchronized instant reception
- 18) Sunrise time
- 19) Sunset time
- 20) Moon Phase

## 3. Set up Guide

### 3.1 Battery installation

Note: To avoid operating problems, please take note of battery polarity before/when inserting any Alkaline Batteries (permanent damaged could be introduced by inserting the battery in wrong direction). Use good quality Alkaline Batteries including Varta and Maxell and avoid rechargeable batteries.

- 1) Insert two AAA batteries into the remote sensor
- 2) Insert three AA batteries into the weather station.
- 3) Wait 3 minutes or until the outdoor temperature is displayed in the weather station.  
***Do not press any keys before outdoor sensor data received.***
- 4) Mount the units, ensuring that the receiver can still pick up the signal from the transmitter. To measure outdoor temperature, place the transmitter less than 100 meters outdoors. It will transmit the temperature from its location.

Every time the remote sensor is powered up (for example after a change of batteries), a random security code is transmitted and this code must be synchronized with the base station to receive weather data. **Thus if battery change happened on transmitter side, then the receiver must be power up again to re-learn the transmitter.**

After the remote sensor is powered up, the sensor will transmit weather data every 8s for 16 times. After this learning period is over, then the transmitter will transmit every 48s.

When the base station is powered up, a short beep will sound and all LCD segments will light up for about 3 seconds before it enters into learning mode to learn the sensors security code.

**Note: DO NOT PRESS ANY KEY** during the first 3 minutes learning period. After both indoor and outdoor data are displayed you can place your remote sensor outdoors and set your time. If there is no temperature reading in the indoor station, make sure the units are within range of each other or repeat the battery installation procedure. If a key is pressed before the weather station receives the temperature signal, you will need to follow the battery installation procedure again. **Please wait 10 seconds before re-insert the battery again to make a proper reset for both transmitter and receiver.**

**Note:**




When batteries require replacement for the base station, the low battery indicator will light up on the LCD.

**Please participate in the preservation of the environment by properly disposing of all used-up batteries and accumulators at designated disposal points. Never dispose of batteries in a fire as this may cause explosion, risk of fire or leakage of dangerous chemicals and fumes**

### 3.2 Mounting

- 1) Base station
- 2) With one foldable legs at the back of the unit, the base station can be placed onto any flat surface or wall mounted at the desired location by the hanging holes also at the back of the unit. It is important to check that the radio signal can be received before permanently mounting any of the units
- 3) Remote sensor
- 4) **Note:** To achieve a true temperature reading, avoid mounting remote sensor in direct sunlight. We recommend that you mount the remote sensor on an outside South-facing wall; obstacles such as walls, concrete, and large metal objects will reduce the 100 meter range.




For wall mount, use 3 screws to affix the wall bracket to the desired wall, plug in the remote sensor to the bracket.

## 4. LCD overview


### 4.1 LCD overview

The following illustration shows the full segments of the LCD for description purposes only and will not appear like this during normal operation.

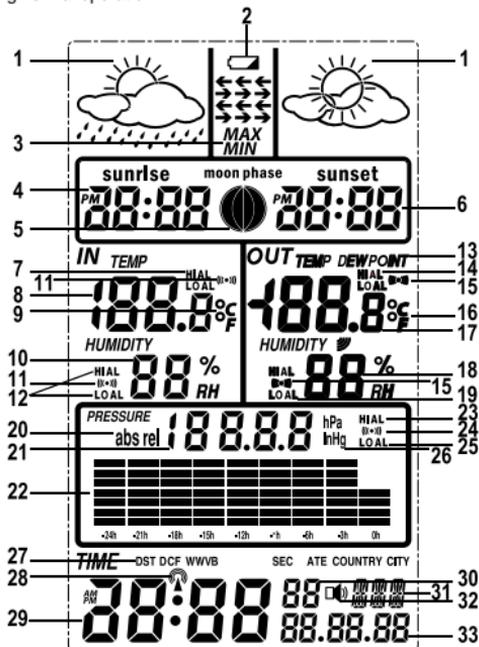

- Weather forecast icon
- low battery indicator
- MIN/MAX information
- Sunrise time
- Moon phase indicator
- Sunset time
- Indoor temperature low / high alarm
- Indoor temperature display
- Temperature display unit
- Indoor humidity display
- Indoor temperature and humidity alarm on indicator
- Indoor humidity low / high alarm
- Dew point temperature display
- Outdoor temperature low/high alarm
- Outdoor temperature and humidity alarm on indicator
- Temperature display unit
- Outdoor temperature display
- Outdoor humidity display
- Outdoor humidity low/high alarm
- Absolute or relative air pressure selection
- Barometer air pressure
- Pressure with 24 hour history graph
- Pressure high alarm
- Pressure alarm on indicator
- Pressure low alarm
- Pressure display unit (inHg or hPa)
- DST - Daylight saving time on/off
- Radio Controlled Time icon not applicable for New Zealand or Australia.
- Time
- Second
- Day of week/ time zone
- Alarm on indicator
- Date (D / M / Y)

#### 4.2 Weather forecasting



Sunny


Partly Cloudy

Cloudy

Rainy

The four weather icons Sunny, partly Cloudy, Cloudy and Rainy represent the weather forecasting. There are also two weather tendency indicators to show the air pressure tendency between the weather icons. The weather forecasting is based upon the change of air pressure.

#### Moon Phase Icons



New Moon

Waxing Crescent

First Quarter

Waxing Gibbous

Full Moon

Waning Gibbous

Last Quarter

Waning Crescent


New Moon

#### 4.3 Weather tendency indicator

The weather tendency indicators arrow is located between the weather icons to show the air pressure tendency and provide a forecast of the weather to be expected by the decreasing or increasing air pressure. The rightward arrow means that the air pressure is increasing and the weather is expected to become better. The leftward arrow means that the air pressure is decreasing and the weather is expected to become worse.

The change of weather forecast icon is in accord to the relationship between current relative pressure and the pressure change since last six hours. If the weather is changing, weather tendency indicator (animated arrows) will be flashing for three hours indicating a weather change is happening. After that, if weather conditions have become stable and no new weather change condition met, then the arrows will be fixed.

#### 4.4 Examples of changing weather icons:



#### 4.5 Storm warning indicator



The storm threshold can be set to suit the user's requirement for storm forecasting from 5-9hPa (default 6hPa). When there is a fall over pressure threshold within 3 hours, the storm forecasting will be activated, the clouds with rain icon and tendency arrows will flash for 3 hours indicating the storm warning feature has been activated.

#### Notes to pressure sensitivity setting for weather forecasting:

The pressure threshold can be set to suit the user's requirement for weather forecasting from 2-4hPa (default 3hPa). For areas that experience frequent changes in air pressure requires a higher setting compared to an area where the air pressure is stagnant. For example if 4hPa is selected, then there must be a fall or rise in air pressure of at least 4hPa before the weather station will register this as a change in weather.

#### 5. Program Mode

The base station has five keys for easy operation: **SET** key, **ALARM** key, **MIN/MAX** key + key and **SNOOZE/LIGHT** key. And there are four program modes available: Quick Display Mode, Setting Mode, Alarm Mode and Min/Max Mode.

The program mode can be exited at any time by either pressing the **SNOOZE/LIGHT** key, or waiting for the 10-second time-out to take effect.

##### 5.1 Quick Display Mode

While in Normal Mode, press the **SET** key to enter the Quick Display Mode as follow:

- 1) Outdoor Temperature / Dew point (press the **MIN/MAX** key or + key shifts the display between outdoor temperature and dew point)
- 2) Absolute pressure / Relative pressure (press the **MIN/MAX** key or + key shifts the display between the absolute pressure and relative pressure)

Press the **SET** key to accept the change and advance to the next display mode. Continue to press the **SET** key to toggle through the display mode until return to the normal Mode

##### 5.2 Setting Modes

- Press the **SET** key for 3 second while in normal mode to enter the normal Setting mode
- Press the **SET** key to select the following setting in sequence :
  - 1) DST ON/OFF (DST=Daylight Saving)  
During the daylight saving DST should be on.
  - 2) Time Zone Setting
  - 3) 12/24 hour format
  - 4) Manual time setting (hours/minutes)
  - 5) Calendar setting (year /month /date)
  - 6) Temperature display unit degree Celsius or Fahrenheit
  - 7) Indoor humidity calibration
  - 8) Outdoor humidity calibration
  - 9) Air pressure display units in hPa or inHg
  - 10) Relative pressure setting from 700hPa – 1100hPa (default 1013.5hPa)
  - 11) Pressure threshold setting (default 2hPa)
  - 12) Storm threshold setting (default 4hPa)
  - 13) City select
- In the setting modes, press + key or **MIN/MAX** key change or scroll the value. Hold the +key or **MIN/MAX** key for 3 second will increase/decrease digits quickly.
- Press **SNOOZE/LIGHT** key or key idle 10 second, the setting mode will return to Normal Mode

**Note:** Please set the units firstly before changing the unit's value. During change of units setting, units' value will change according to new units but it might cause resolution loss due to its internal calculation algorithm.

### 5.3 Alarm Modes

- While in Normal Mode press the **ALARM** key to enter the High Alarm Mode
- Press the **ALARM** key again to enter Low Alarm mode  
**Remark:** After the initial pressing of **ALARM** key, the display will be refreshed to show current high, low alarm value. Normal alarm value will be displayed only for those already activated, all other not activated values will be displayed with "--" or "--" instead.
- Press the **ALARM** key again to return the Normal Mode
- In the High Alarm Mode press the **SET** key to select the following alarm modes:
  1. Time alarm (hour/minute)
  2. Indoor humidity high alarm
  3. Indoor temperature high alarm
  4. Outdoor humidity high alarm
  5. Outdoor temperature and dew point high alarm
  6. Pressure high alarm
- In the Low Alarm Mode press the **SET** key to select the following alarm modes:
  1. Time alarm (hour/minute)
  2. Indoor humidity low alarm
  3. Indoor temperature low alarm
  4. Outdoor humidity low alarm
  5. Outdoor temperature and dew point low alarm
  6. Pressure low alarm
- In the alarm modes, Press **+** key or **MIN/MAX** key change or scroll the alarm value. Hold the **+** key or **MIN/MAX** key for 3 second to change the number quickly. Press the **ALARM** key to choose the alarm on or off (if alarm is enabled, the speaker icon on the LCD will be turned on indicating the alarm function has been enabled). Press the **SET** key to confirm the setting and continue pressing the **SET** key to toggle through each alarm mode until it returns to the normal display mode.
- Press **SNOOZE/LIGHT** key or key idle 10 second at any time, the alarm mode will return to Normal Mode

#### Canceling the Temperature Alarm While Sounding


a. When a set weather alarm condition has been activated, that particular alarm will sound and flash for 120 second. Press any key to mute the alarm. When weather alarm condition was activated again within 10 minutes, alarm will not sound but will continue to flash until weather conditions have become more steady. This feature is useful to avoid repeated triggering for the same alarm value.

b. The alarm will reactivate automatically once the value has fallen below the set value, or if a new value is entered.

#### The outdoor weather alarm

When a set outdoor weather alarm has been triggered, it will flash on the LCD display and the general outdoor alarm icon and high/low alarm icon will flash accordingly. For example in outdoor temperature display mode, when dew point high alarm is triggered, **DEW POINT** icon will flash along with general outdoor alarm icon and high alarm icon flashing, telling that the current alarm source is from dew point.

#### Temperature display mode



#### Dew point high alarm was triggered



#### 5.4 Min/Max Mode

- While in Normal Mode, press the **MIN/MAX** key to enter the maximum mode, **MAX** logo and the general Max record will be displayed.
- Press **MIN/MAX** key again to enter the minimum mode, **MIN** icon and minimum record will be displayed
- Press **MIN/MAX** key again to return the Normal Mode
- In the maximum reading Mode, press the **+** key to display the following maximum values together with the time and date time stamp at which these values were recorded:
  1. Indoor humidity maximum
  2. Indoor temperature maximum
  3. Outdoor humidity maximum
  4. Outdoor temperature maximum
  5. Outdoor dewpoint maximum.
  6. Pressure maximum
- In the minimum reading Mode, press the **+** key to display the following minimum values together with the time and date at which these values were recorded:
  1. Indoor humidity minimum
  2. Indoor temperature minimum
  3. Outdoor humidity minimum
  4. Outdoor temperature minimum
  5. Outdoor dewpoint minimum.
  6. Pressure minimum
- While in the minimum or maximum mode, press SET key for 2 seconds individual minimum or maximum record will be reset to current reading together with the current time and date.
- Press the **SNOOZE/LIGHT** key or key idle 10 seconds, the Min/Max mode will return to Normal Mode

#### 6. City location listing

Country	City		Country	State	
	City name	Abbreviation		State name	Abbreviation
New Zealand NZL	Auckland	AUK	Australia AUS	New South Wales	NSW
	Bay of Plenty	BOP		Queensland	QLD
	Canterbury	CAN		South Australia	SA
	Hawke's Bay	HKB		Tasmania	TAS
	Northland	NTL		Victoria	VIC
	Otago	OTA		Western Australia	WA
	Southland	STL		Australian Capital Territory	ACT
	Taranaki	TKI		Northern Territory	NT
	Waikato	WKO			
	Wellington	WGN			
	West Coast	WTC			
	Tasman District	TAS			
	Chatham Islands Territory	CIT			

The sunrise/sunset times will be calculating automatically base on the selected city.

## 7. Problems and interference with operation

Problem & cause	Remedy
Distance between the transmitter and receiver too long	Reduce distance between the transmitter and receiver to receive signal
High shielding materials between the units (thick walls, steel, concrete, isolating aluminum foil, etc.)	Find a different location for sensor and/or receiver. See also item 'transmission range' below
Interference from other sources (e.g. wireless radio, headset, speaker, etc. operating on the same frequency)	Find a different location for the sensor and/or base station. Neighbors using electrical devices operation on the same signal frequency can also cause interference with reception
No reception after adding extension cables	Find a new location for the sensor and/or base station.
Poor contrast LCD or no reception or low batteries in sensor or receiver	Change batteries ( check low battery indicator on the LCD)
Temperature, humidity, or air pressure is incorrect.	Check/replace batteries. If multiple remote sensors are in use, check location with corresponding "boxed numbers". Or move away from sources of heat/cold. Adjust relative air pressure to a value from a reliable source (TV radio, etc.).

## 8. Specifications

### Outdoor data

Transmission distance in open field	: 100 meters max.
Frequency	: 433MHz
Temperature range	: -40 °C to +65 °C (show OFL if outside range)
Resolution	: 0.1 °C
Measuring range rel. humidity	: 20%~95%
Humidity accuracy	: +/-5% under 0-45 °C
Measuring interval thermo-hygro sensor	: 48 sec
Water proof level	: IPX3

### Indoor data

Pressure / temperature	: 48 sec
Indoor temperature range	: 0 °C to +60 °C
Resolution	: 0.1 °C
Measuring range rel. humidity	: 1% ~ 99%
Resolution	: 1%
Measuring range air pressure	: 700hPa – 1100hPa
Resolution/Accuracy	: 0.1hPa/1.5hPa
Alarm duration	: 120 sec

### Power consumption

Base station	: 3 x AA 1.5V LR6 Alkaline batteries
Remote sensor	: 2 x AAA 1.5V LR03 Alkaline batteries
Battery life	: Minimum 12 months for base station Minimum 24months for remote sensor