


## Thermal Probe

### TP-K01



- K-Type general purpose bead probe
- Measurement range: -50°C to 200°C  
-58°F to 392°F
- Tolerances:  $\pm 2.2^{\circ}\text{C}$  ( $\pm 3.9^{\circ}\text{F}$ )

### TP-K02




- K-Type immersion probe
- Measurement range: -50°C to 700°C  
-58°F to 1292°F
- Tolerances:  $\pm 2.2^{\circ}\text{C}$  ( $\pm 3.9^{\circ}\text{F}$ )

### TP-K03



- K-Type flat surface probe
- Measurement range: -50°C to 400°C  
-58°F to 752°F
- Tolerances:  $\pm 2.2^{\circ}\text{C}$  ( $\pm 3.9^{\circ}\text{F}$ )

### TP-K04

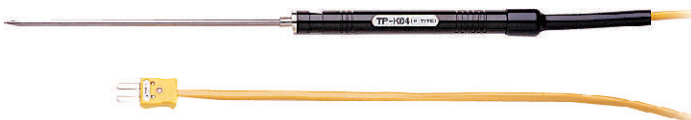

- K-Type piercing probe
- Measurement range: -50°C to 600°C  
-58°F to 1122°F
- Tolerances:  $\pm 2.2^{\circ}\text{C}$  ( $\pm 3.9^{\circ}\text{F}$ )

### TP-K05



- K-Type flat surface probe
- Measurement range: -50°C to 400°C  
-58°F to 752°F
- Tolerances:  $\pm 2.2^{\circ}\text{C}$  ( $\pm 3.9^{\circ}\text{F}$ )

### TP-K06



- K-Type air probe
- Measurement range: -50°C to 800°C  
-58°F to 1472°F
- Tolerances:  $\pm 2.2^{\circ}\text{C}$  ( $\pm 3.9^{\circ}\text{F}$ )